



Front/Rear Mounting


In both cases, when using mains power, the cable must be routed outward to the side through the channel, or to the rear through a suitable hole in the substrate.

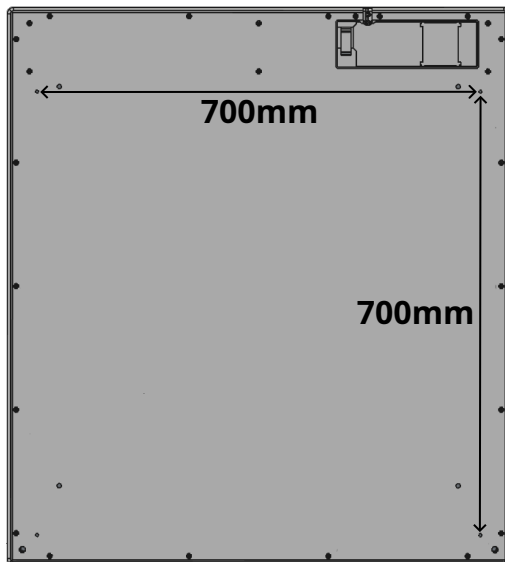


For front mounting, LumiTap provides four 5mm holes in the base plate, in a 700 mm square pattern.

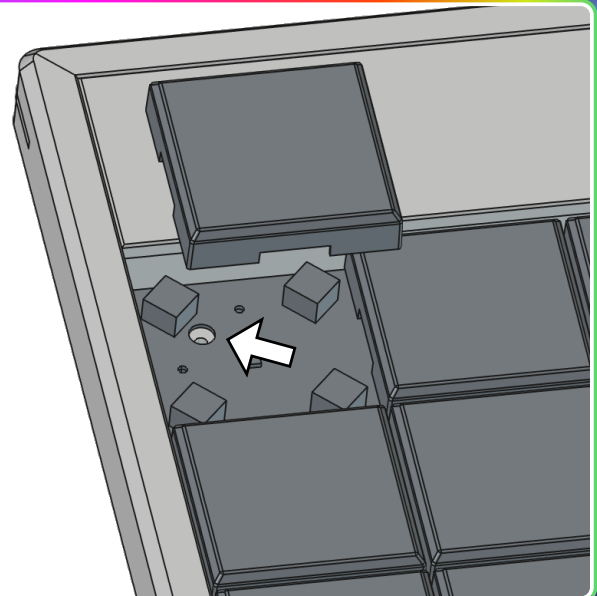

The holes are accessible from above by removing the caps in the four corners . The screws used must not touch the board (head diameter: max. 9 mm).

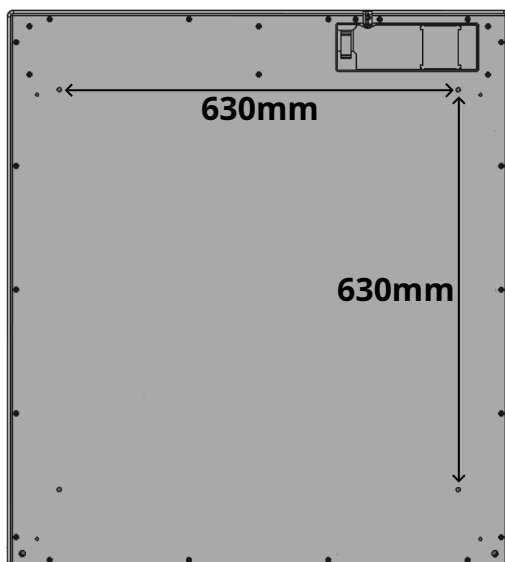

For rear mounting, LumiTap provides four threaded inserts (M5) in the base plate, in a 630 mm square pattern provided.

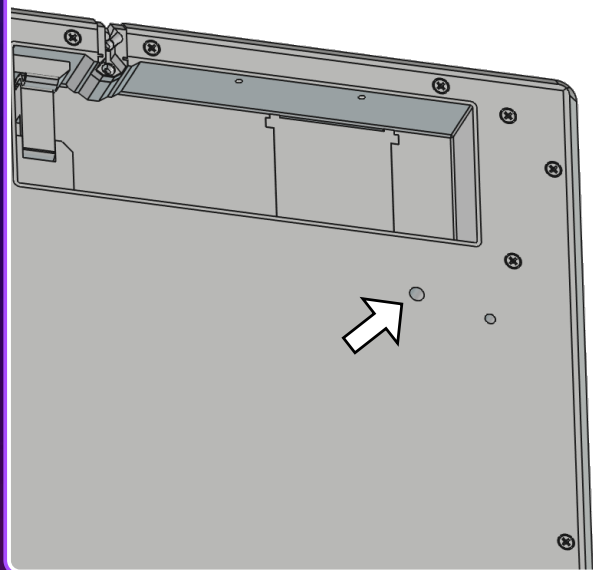

The M5 screws used must not be screwed more than 10 mm into the threaded inserts.