




Display Tablet

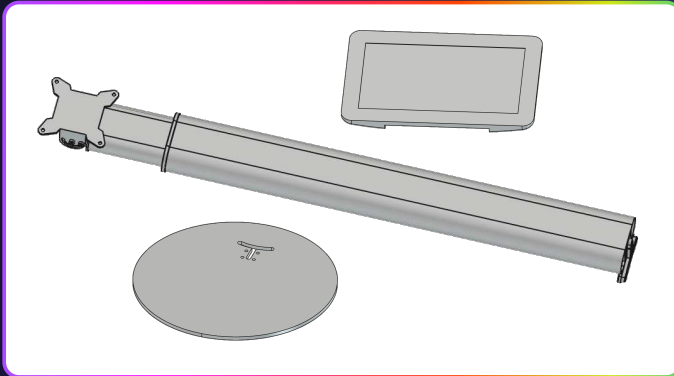


The package contains a display, a base and a column. The cable and power supply for the display are already attached to the column.

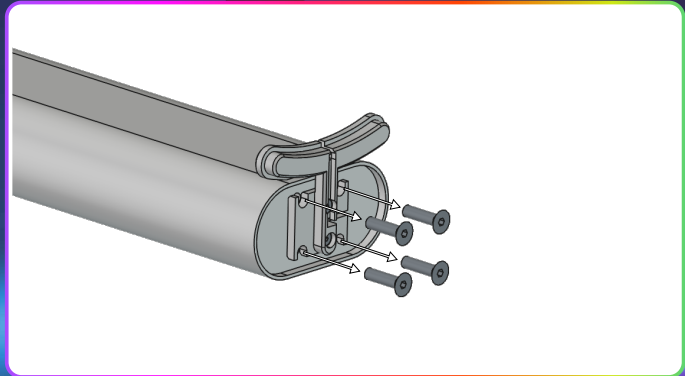


During shipment, the screws for attaching the base are stored in their holes in the column and must be removed before attaching the base.

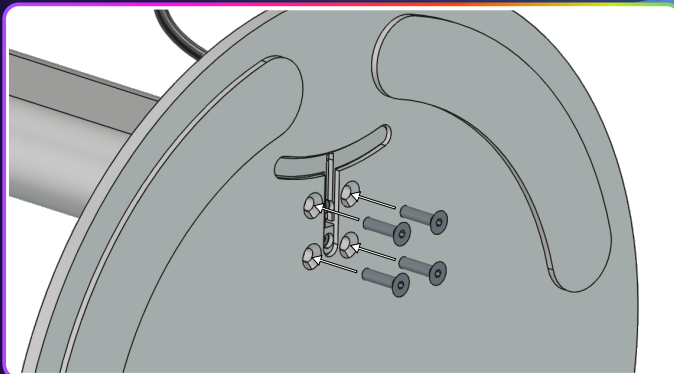


Then place the base onto the bracket at the end of the column and secure it with the screws. The power cable should be threaded through the bracket, exiting at the top of the base.

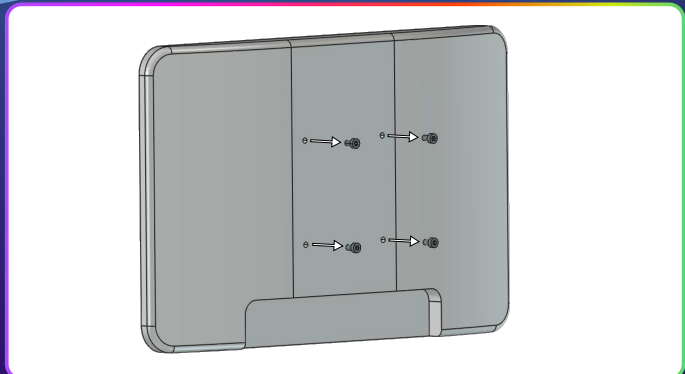

During shipment, the screws for attaching the display are stored in their holes in the display and must be removed before attaching the display.

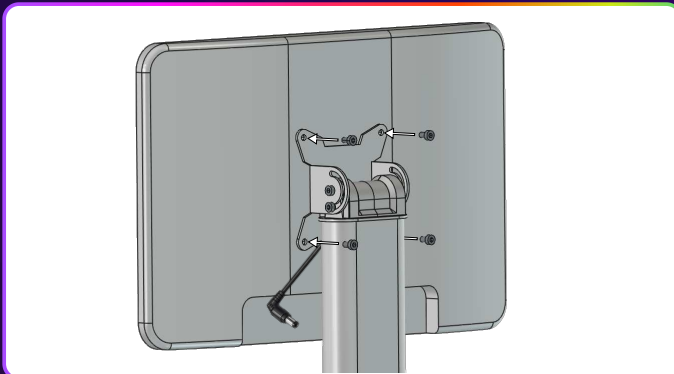

Then attach the display to the column using the screws. The recess at the lower edge must face the point where the power cable from the column comes out.

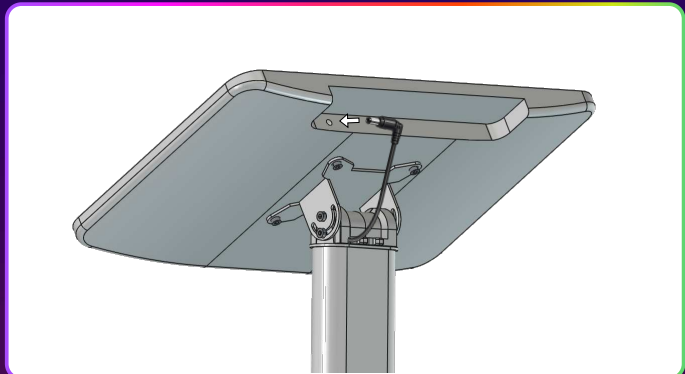

The power cable from the column must finally be connected to the display.